

7UHQFK 026 %DUULHU 6FKRWWN\ 5H

DO-201AD
TSA 9



Cathode \leftarrow Anode

Features

- ‡ \$GYDQWUHQFK WHFKQRORJ\
- ‡ /RZRZURGRWDJH GURS
- ‡ /RZRZURVVHV
- ‡ +LJHILFLHQF\ RSHUDWLRO
- ‡ /HDGHHLQLVK &RPSOLDQW

Applications

- ‡ '&' & RQYHUWHUV
- ‡ \$&' & GDSWRUV
- ‡ 6ZLWFKRZHXSSOLHV
- ‡)UHHZKHHLRGRJ

Maximum ratings and electrical characteristics (T_J = 25°C unless otherwise noted)

3DUDPHWHU		6\PERO	/LPLW	8QLW
0D[LPHSHVSHUNYHYURQWDJH		9550		9
0D[LPHYHURJHZDUG UFXEWHIQWG		,) \$9		\$
3HDN IRVZDUEBUHQW VLQDQHQZDYH VXSHULPSHQHGRSGLRGH		,) 60		\$
2SHUDMXQEDQGRWRUDJH WHPSHUDW		X0H767°C	JH WR	f &
7\SLFVCHUPDO USHVUVQHDQFH		'2 \$'	5\$-&	f & :
,QVWDQWDQHRROWRUJZDUG SHGLRGH	,) \$	7- f&	7 < 3	0\$;
	,) \$	7- f&		
	,) \$	7- f&		
	,) \$	7- f&		
,QVWDQWDQHRXUUSHQHGRJWH UDWHYHYURQWDJH	7- f&	,5		X\$
	7- f&			P\$

1RWHV



3XOVH WHVVSXOVH ZLGWK GXW\F\FOH

3XOVH WHVW 3XOPH ZLGWK 0

RATINGS AND CHARACTERISTICS CURVES 7\$


QVVRWUZVHRWG

,XJ\$ 6HYHUVH & XUUHP 0

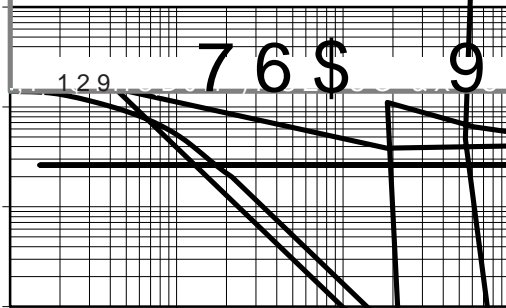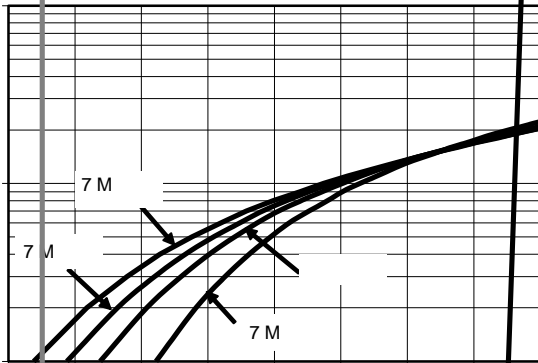

PACKAGE OUTLINE DIMENSIONS




DO-201AD

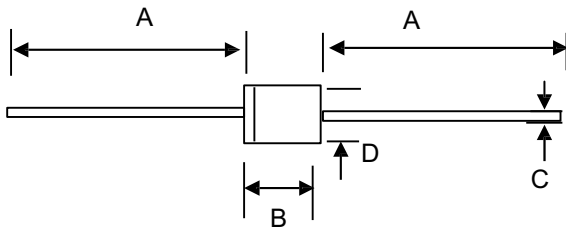

				C	
				1.4	
				1.1	
				5.1	

0DUNLQJ ,QIRUPDWLRQ

73URGXFW PGRH
83' & LQIRUPDWLRQ

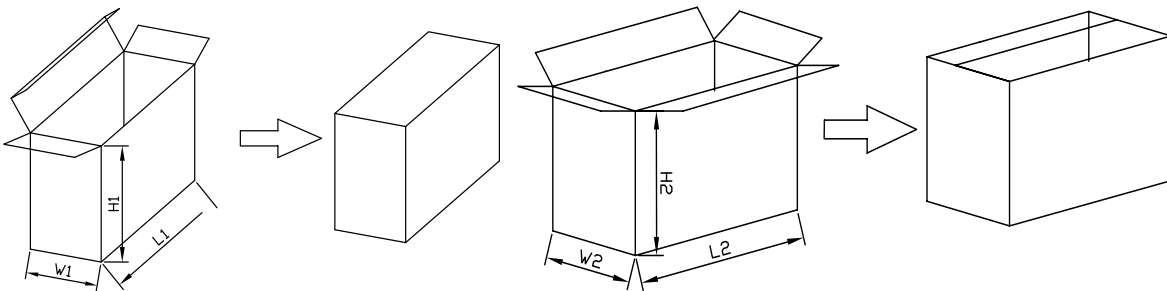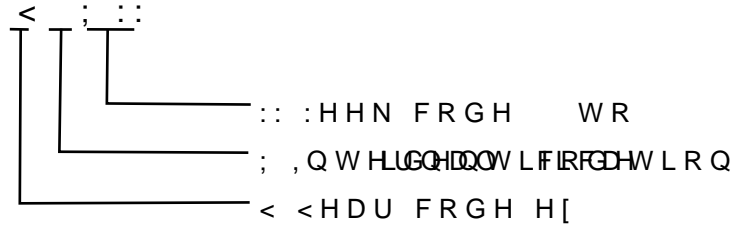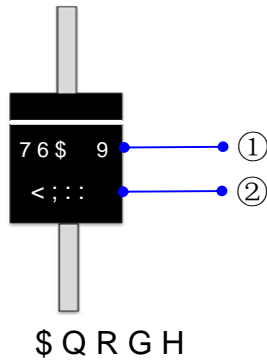

				4Í	4FÍ	Gì€	HG€
ÙVŸ	ÚÔÙ	Ù { æ ^ • c h } æ & \ æ * ^ É F € € € Ú Ô Ù B & æ i c [} Á			F € € € € Ú Ô Ù B & æ i c [} É F € à [c ^ • Á a } Á c [c æ]		
P [c ^	V [^ i æ } & ^	m G € { { É t H { { L		G F É F € € { { É t Í { { L		F € F É Í € € { { É t F € { {	